

# Shade

## Datasheet



### INSTALLATION

- Installation method: 2-lock for floating or glue down
- Installation instruction: Download from [www.tarkett.com](http://www.tarkett.com). Contact your supplier for more details
- Underfloor heating compatible. Maximum floor surface temperature 27°C with self-regulating underfloor heating system
- Start & Stop: Shorter lengths of planks included in approx. 1 pack per 20 m<sup>2</sup>

### MAINTENANCE

These Tarkett wooden floors have a Proteco surface treatment and therefore a strong protection against normal wear, abrasion, scratches and stains. Some floors will require more frequent maintenance for increased life span. Generally these products are light coloured floors and hardwax oiled floors, particularly with brushed surface and/or highlighted details.

Always make sure to follow the most recently updated maintenance instructions on [www.tarkett.com](http://www.tarkett.com).

### RECOMMENDED ACCESSORIES

- Installation: Tarkofoam II / Tarkoflex II / Installation kit
- Aesthetics: Skirting, Transition moulding, Pipe covers
- Care & maintenance: Tarkoclean for lacquered floors, Refresher for lacquered floors

---

See more alternatives and the complete range of accessories @ [www.tarkett.com](http://www.tarkett.com)

---

Product Name	Product Code	Page
Shade - ASH IVORY PLANK (1-strip)	41006008	<a href="#">15</a>
Shade - OAK CREAM WHITE MIDIPLANK (1-strip)	41016001	<a href="#">16</a>
Shade - OAK EVENING GREY MIDIPLANK (1-strip)	41016002	<a href="#">17</a>
Shade - OAK SNOW FLAKE MIDIPLANK (1-strip)	41016008	<a href="#">18</a>
Shade - OAK AUTHENTIC MIDIPLANK (1-strip)	41016009	<a href="#">19</a>
Shade - OAK NORTHERN WHITE TRES (3-strip)	41025001	<a href="#">20</a>
Shade - OAK STONE GREY PLANK (1-strip)	7876088	<a href="#">21</a>
Shade - OAK ITALIAN BROWN PLANK (1-strip)	7876112	<a href="#">22</a>
Shade - OAK PRALINE PLANK (1-strip)	7876130	<a href="#">23</a>
Shade - OAK COTTON WHITE PLANK XT (1-strip)	7877033	<a href="#">24</a>
Shade - OAK COTTON WHITE PLANK XT (1-strip)	7877034	<a href="#">25</a>
Shade - OAK CREAM WHITE PLANK XT (1-strip)	7877049	<a href="#">26</a>
Shade - OAK ESSENCE PLANK XT (1-strip)	7877050	<a href="#">27</a>
Shade - OAK MISTY GREY PLANK XT (1-strip)	7877070	<a href="#">28</a>
Shade - OAK SOFT BEIGE PLANK (1-strip)	7878023	<a href="#">29</a>
Shade - OAK NUTMEG PLANK XT (1-strip)	7879032	<a href="#">30</a>
Shade - ASH LINEN WHITE PLANK (1-strip)	7967908	<a href="#">31</a>
Shade - ASH LINEN WHITE PLANK (1-strip)	7967909	<a href="#">3</a>
Shade - ASH MELANGE TRES (3-strip)	7969003	<a href="#">4</a>
Shade - ASH LINEN WHITE TRES (3-strip)	7969009	<a href="#">5</a>
Shade - OAK MISTY GREY TRES (3-strip)	8723040	<a href="#">6</a>
Shade - OAK ALMOND TRES (3-strip)	8723042	<a href="#">7</a>
Shade - OAK CREAM WHITE TRES (3-strip)	8723925	<a href="#">8</a>
Shade - OAK COTTON WHITE TRES (3-strip)	8723926	<a href="#">9</a>
Shade - OAK SOFT BEIGE TRES (3-strip)	8723927	<a href="#">10</a>
Shade - OAK COTTON WHITE DUOPLANK (2-strip)	8727004	<a href="#">11</a>
Shade - OAK ESSENCE DUOPLANK (2-strip)	8727009	<a href="#">12</a>
Shade - OAK ITALIAN BROWN DUOPLANK (2-strip)	8727013	<a href="#">13</a>
Shade - OAK CREAM WHITE DUOPLANK (2-strip)	8727901	<a href="#">14</a>

# Shade - ASH IVORY PLANK (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	41006008
Format	Plank 162 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	None
Bevelled edges	2-side minibevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	1,94 m <sup>2</sup>
Surface per pallet	69,84 m <sup>2</sup>
Net weight	7,3 kg
Character	Calm
Latin Name	Fraxinus Angustifolia
Declaration of Performance #	0190-0103
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	82 / 1

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	4	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

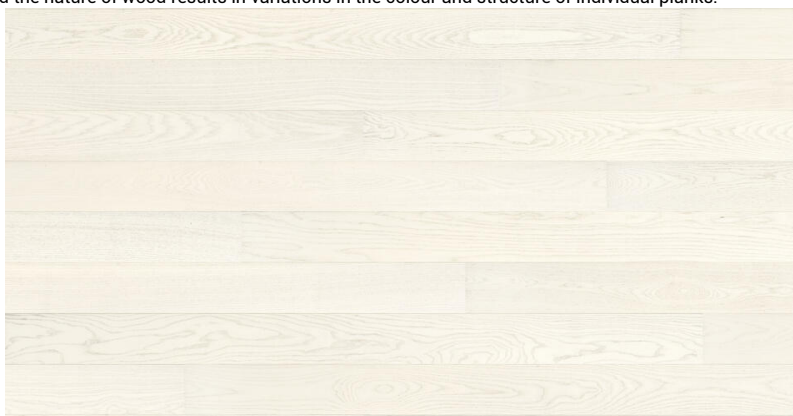

# Shade - OAK CREAM WHITE MIDIPLANK (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	41016001
Format	Plank 134 x 1850 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	8
Surface per box	1,98 m <sup>2</sup>
Surface per pallet	55,44 m <sup>2</sup>
Net weight	7,3 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0103
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	40 / 4

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

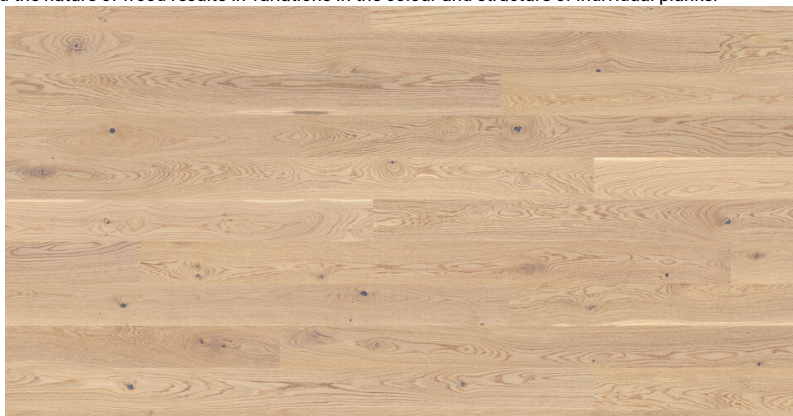

# Shade - OAK EVENING GREY MIDIPLANK (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	41016002
Format	Plank 134 x 1850 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	8
Surface per box	1,98 m <sup>2</sup>
Surface per pallet	55,44 m <sup>2</sup>
Net weight	7,3 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0103
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	32 / 2

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

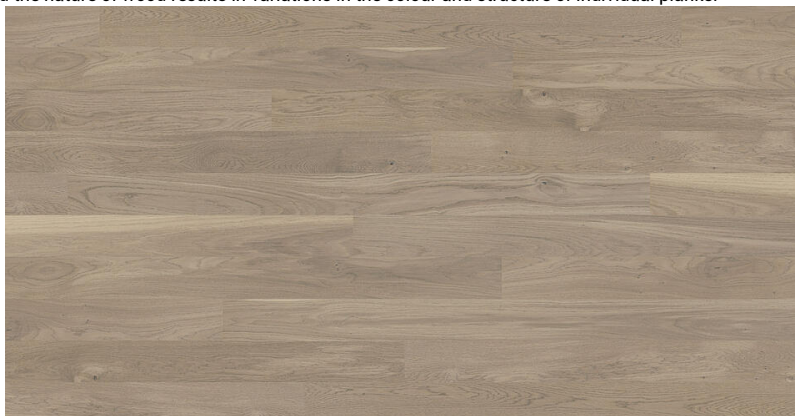

# Shade - OAK SNOW FLAKE MIDIPLANK (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	41016008
Format	Plank 134 x 1850 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	8
Surface per box	1,98 m <sup>2</sup>
Surface per pallet	55,44 m <sup>2</sup>
Net weight	7,3 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0103
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	53 / 2

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

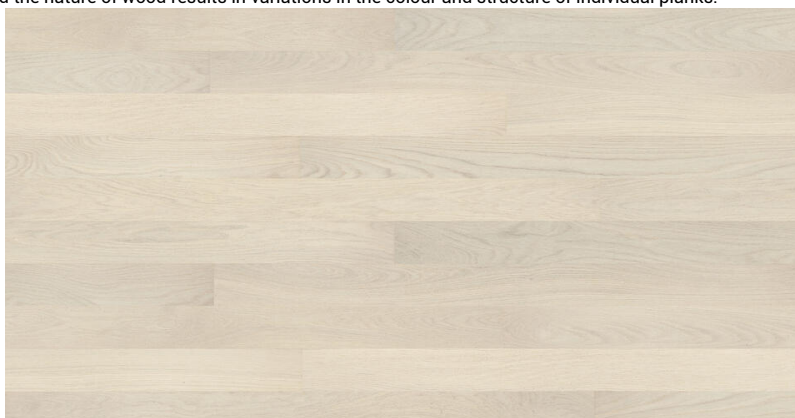

# Shade - OAK AUTHENTIC MIDIPLANK (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	41016009
Format	Plank 134 x 1850 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	8
Surface per box	1,98 m <sup>2</sup>
Surface per pallet	55,44 m <sup>2</sup>
Net weight	7,3 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0103
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	38 / 5

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

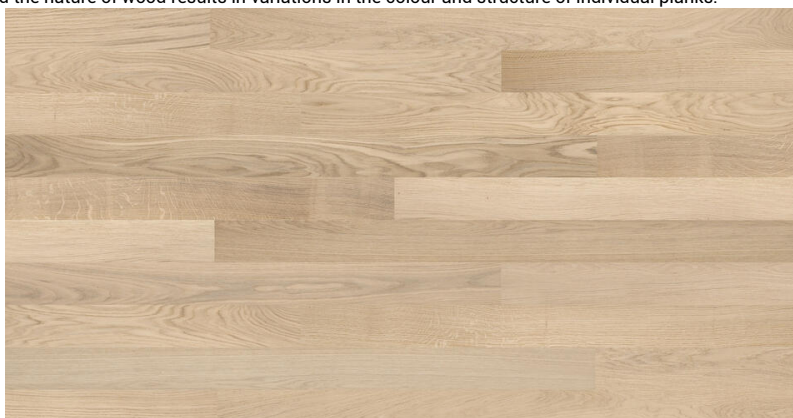

# Shade - OAK NORTHERN WHITE TRES (3-strip)

## Datasheet

Product Information	Tarkett Value
Material code	41025001
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m <sup>2</sup>
Surface per pallet	106,4 m <sup>2</sup>
Net weight	6,7 kg
Character	Calm
Latin Name	Quercus Rubra
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,0942 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	59 / 4


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m <sup>2</sup> K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction  
Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

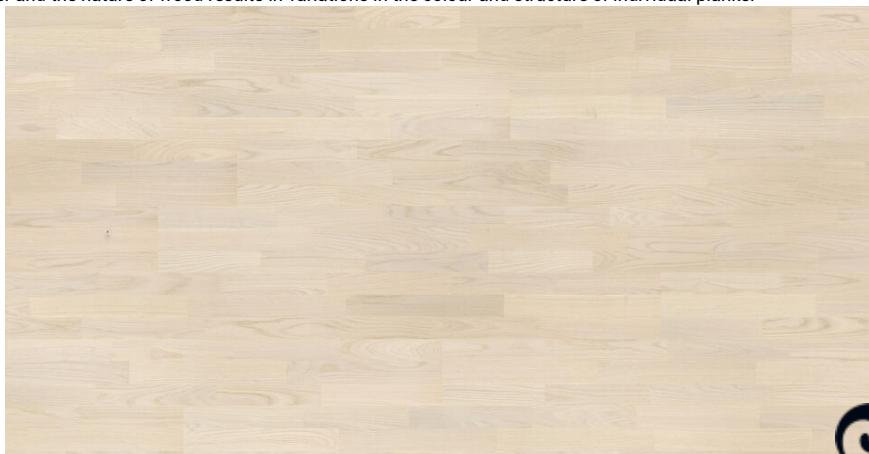

# Shade - OAK STONE GREY PLANK (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7876088
Format	Plank 162 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	1,94 m <sup>2</sup>
Surface per pallet	69,84 m <sup>2</sup>
Net weight	7,9 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	15 / 2

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

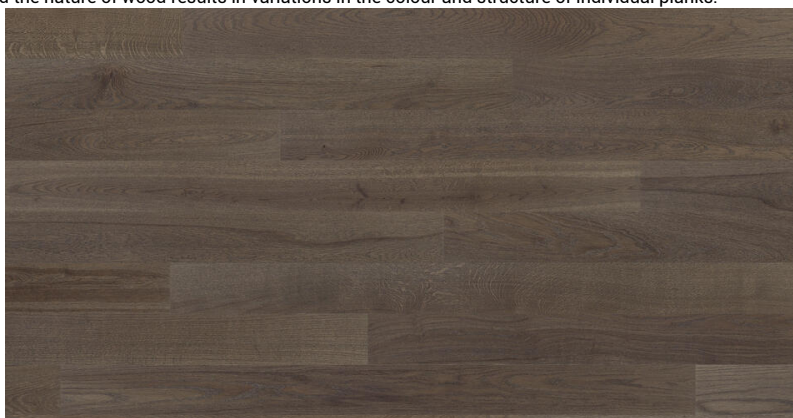

# Shade - OAK ITALIAN BROWN PLANK (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7876112
Format	Plank 162 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	1,94 m <sup>2</sup>
Surface per pallet	69,84 m <sup>2</sup>
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	15 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



# Shade - OAK PRALINE PLANK (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7876130
Format	Plank 162 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,14 m <sup>2</sup>
Surface per pallet	77,04 m <sup>2</sup>
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	19 / 4

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

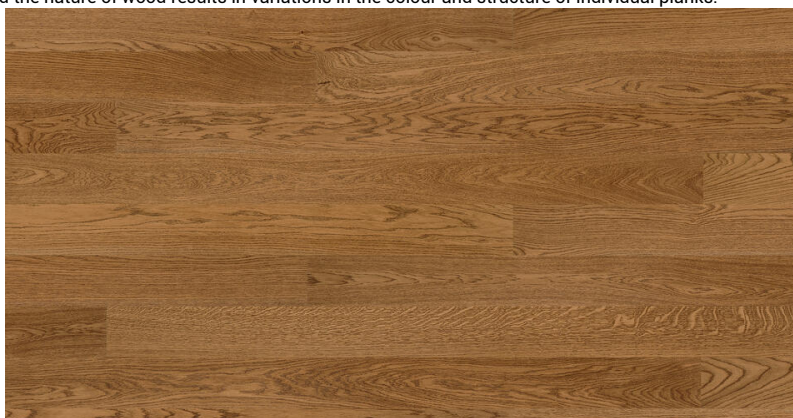

# Shade - OAK COTTON WHITE PLANK XT (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7877033
Format	Plank 190 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	None
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,51 m <sup>2</sup>
Surface per pallet	87,85 m <sup>2</sup>
Net weight	7,9 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	50 / 4


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction Softwood Veneer and Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

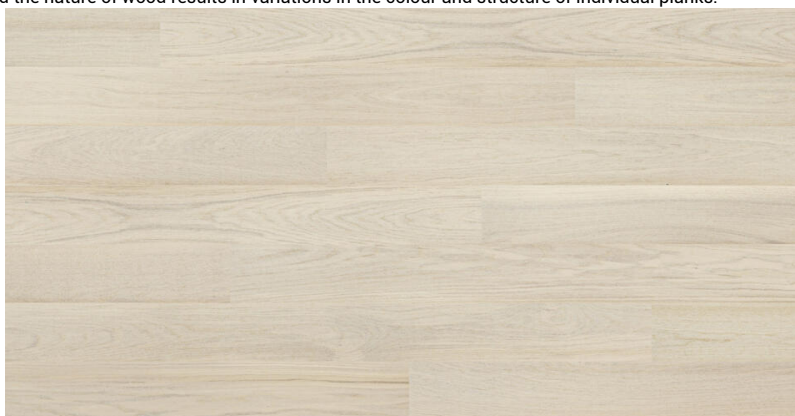

# Shade - OAK COTTON WHITE PLANK XT (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7877034
Format	Plank 190 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	None
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,28 m <sup>2</sup>
Surface per pallet	79,8 m <sup>2</sup>
Net weight	7,9 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	50 / 4

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

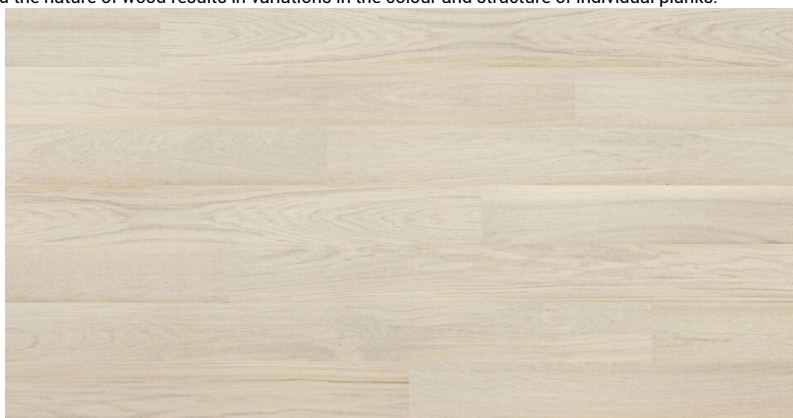

# Shade - OAK CREAM WHITE PLANK XT (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7877049
Format	Plank 190 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,28 m <sup>2</sup>
Surface per pallet	79,8 m <sup>2</sup>
Net weight	7,9 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	42 / 2

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

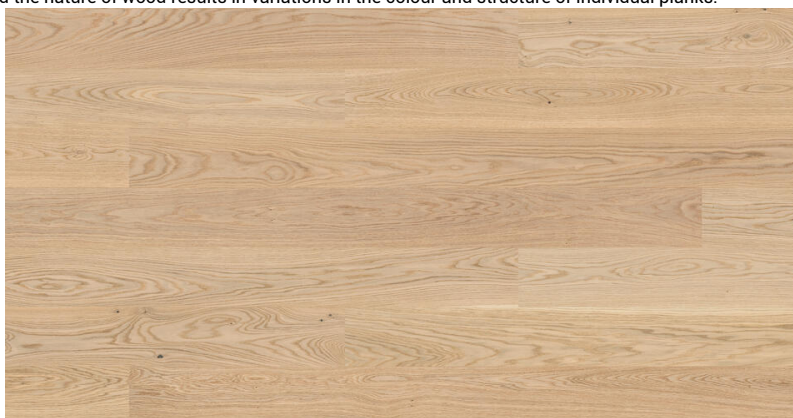

# Shade - OAK ESSENCE PLANK XT (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7877050
Format	Plank 190 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,51 m <sup>2</sup>
Surface per pallet	87,85 m <sup>2</sup>
Net weight	7,9 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	39 / 4

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

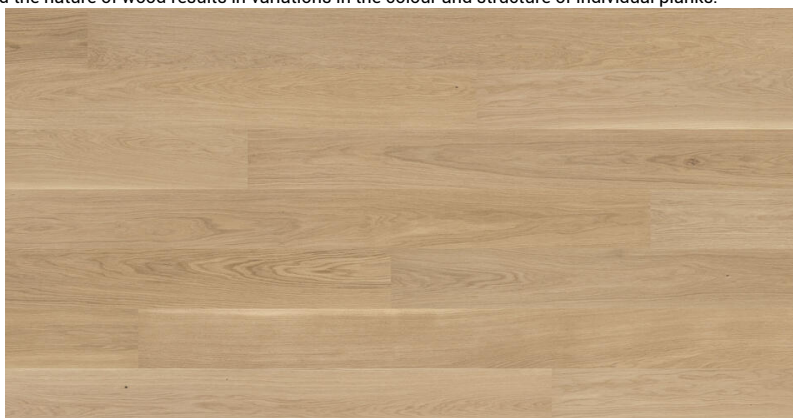

# Shade - OAK MISTY GREY PLANK XT (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7877070
Format	Plank 190 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,51 m <sup>2</sup>
Surface per pallet	87,85 m <sup>2</sup>
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	31 / 7


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m <sup>2</sup> K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction Softwood Veneer and Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

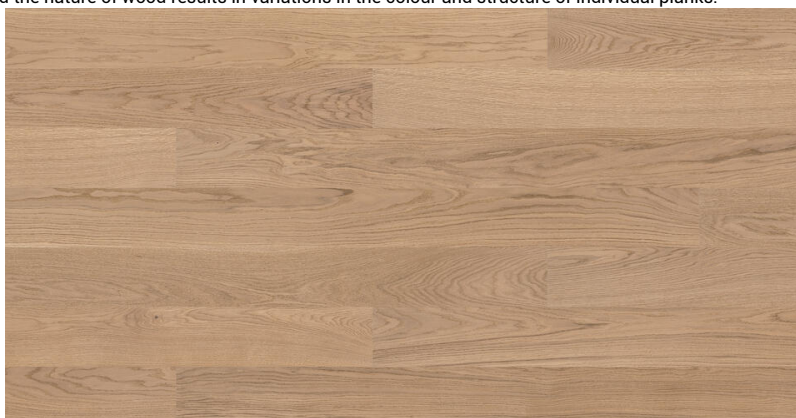

# Shade - OAK SOFT BEIGE PLANK (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7878023
Format	Plank 162 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,14 m <sup>2</sup>
Surface per pallet	77,04 m <sup>2</sup>
Net weight	7,3 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0103
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	32 / 3

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

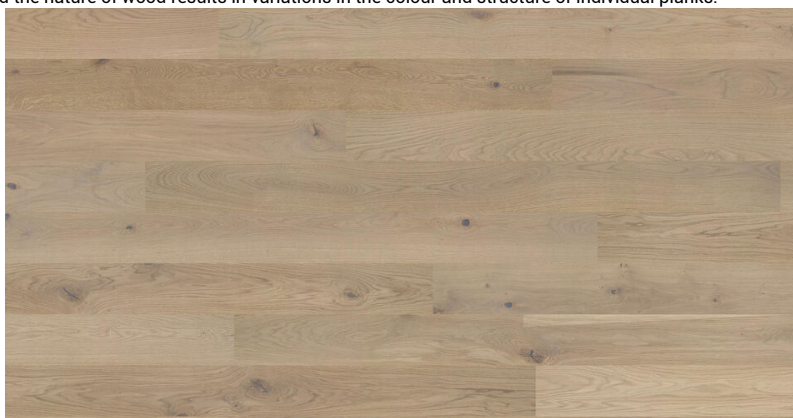

# Shade - OAK NUTMEG PLANK XT (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7879032
Format	Plank 190 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,28 m <sup>2</sup>
Surface per pallet	79,8 m <sup>2</sup>
Net weight	7,3 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0103
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	29 / 2

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

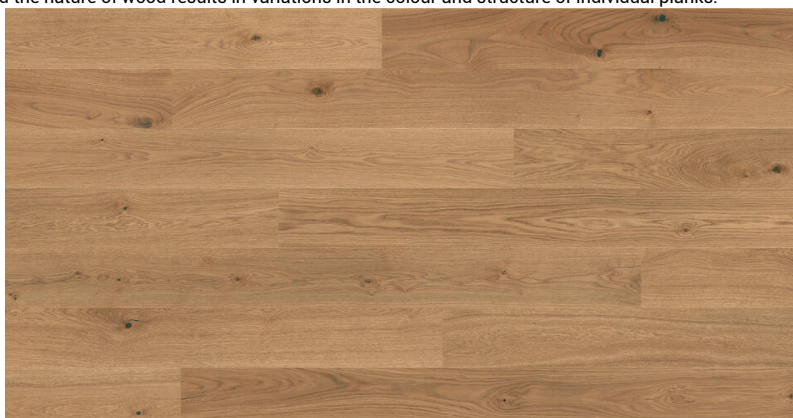

# Shade - ASH LINEN WHITE PLANK (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7967908
Format	Plank 162 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	None
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,14 m <sup>2</sup>
Surface per pallet	77,04 m <sup>2</sup>
Net weight	7,9 kg
Character	Calm
Latin Name	Fraxinus Angustifolia
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	64 / 4

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	4	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

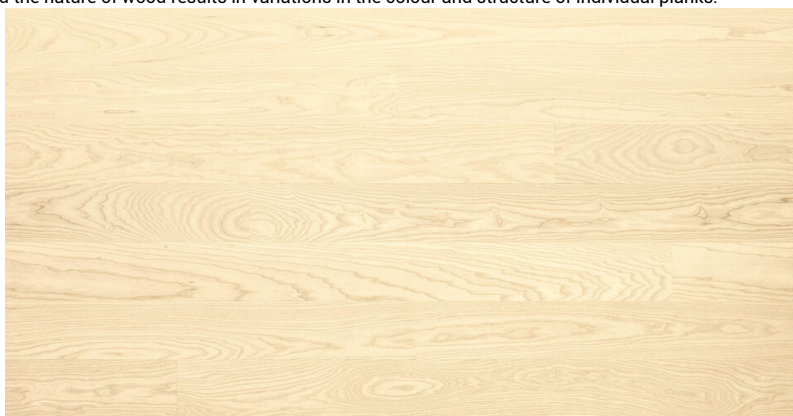

# Shade - ASH LINEN WHITE PLANK (1-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7967909
Format	Plank 162 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	None
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	1,94 m <sup>2</sup>
Surface per pallet	69,84 m <sup>2</sup>
Net weight	7,9 kg
Character	Calm
Latin Name	Fraxinus Angustifolia
Declaration of Performance #	0190-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	64 / 4

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	4	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m <sup>2</sup> K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

### Construction

Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

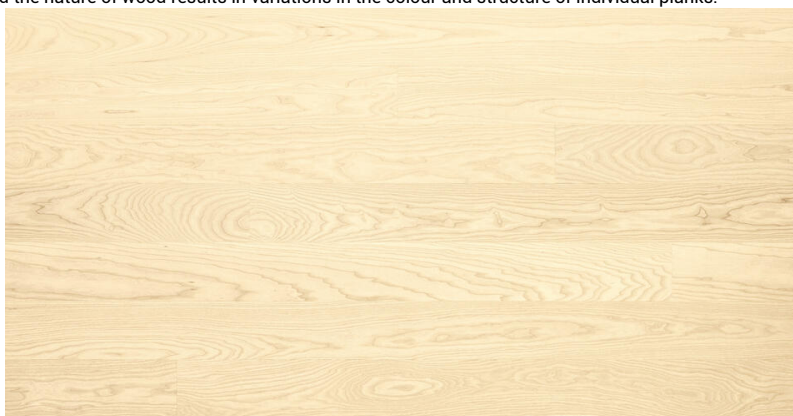

# Shade - ASH MELANGE TRES (3-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7969003
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m <sup>2</sup>
Surface per pallet	106,4 m <sup>2</sup>
Net weight	6,7 kg
Character	Expressive
Latin Name	Fraxinus Angustifolia
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,0942 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	48 / 6


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	4	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m <sup>2</sup> K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction  
Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

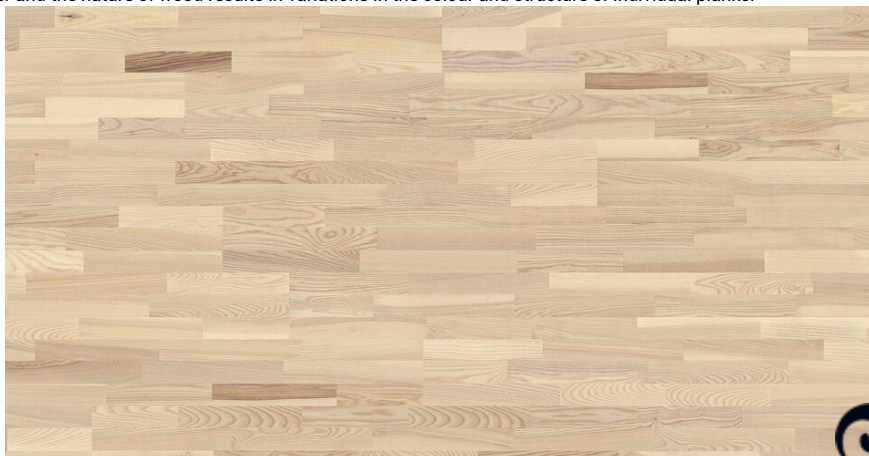

# Shade - ASH LINEN WHITE TRES (3-strip)

## Datasheet

Product Information	Tarkett Value
Material code	7969009
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m <sup>2</sup>
Surface per pallet	106,4 m <sup>2</sup>
Net weight	6,7 kg
Character	Lively
Latin Name	Fraxinus Angustifolia
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,0942 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	61 / 5


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	4	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction  
Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

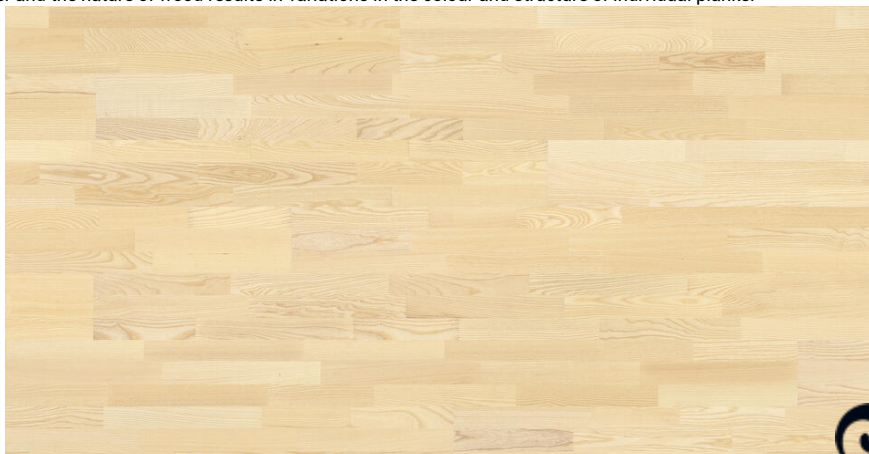

# Shade - OAK MISTY GREY TRES (3-strip)

## Datasheet

Product Information	Tarkett Value
Material code	8723040
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m <sup>2</sup>
Surface per pallet	106,4 m <sup>2</sup>
Net weight	6,7 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,0942 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	32 / 3


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m <sup>2</sup> K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction  
Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

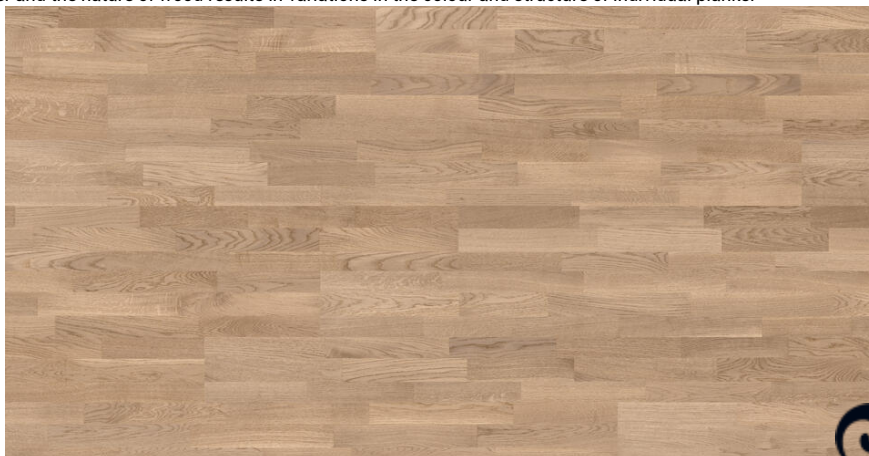

# Shade - OAK ALMOND TRES (3-strip)

## Datasheet

Product Information	Tarkett Value
Material code	8723042
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m <sup>2</sup>
Surface per pallet	106,4 m <sup>2</sup>
Net weight	6,7 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,0942 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	21 / 2

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m <sup>2</sup> K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction  
Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



# Shade - OAK CREAM WHITE TRES (3-strip)

## Datasheet

Product Information	Tarkett Value
Material code	8723925
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m <sup>2</sup>
Surface per pallet	106,4 m <sup>2</sup>
Net weight	6,7 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,0942 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	42 / 10

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m <sup>2</sup> K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction  
Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



# Shade - OAK COTTON WHITE TRES (3-strip)

## Datasheet

Product Information	Tarkett Value
Material code	8723926
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m <sup>2</sup>
Surface per pallet	106,4 m <sup>2</sup>
Net weight	6,7 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,0942 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	46 / 3


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m <sup>2</sup> K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction  
Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

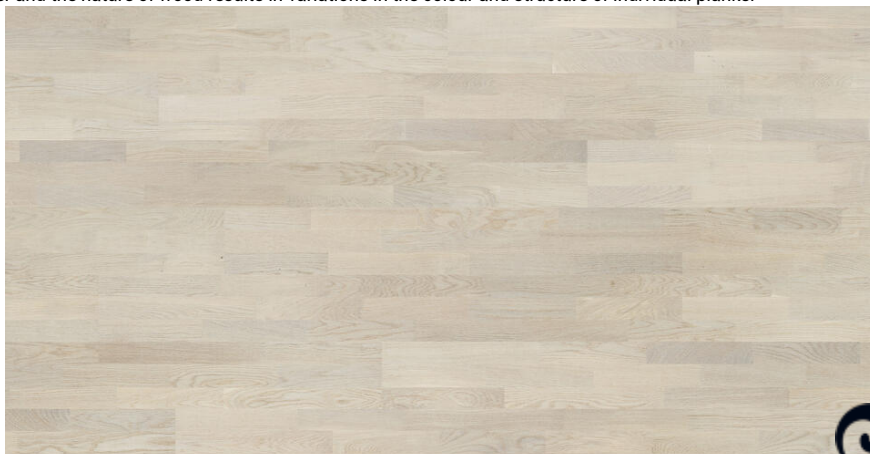

# Shade - OAK SOFT BEIGE TRES (3-strip)

## Datasheet

Product Information	Tarkett Value
Material code	8723927
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	No bevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m <sup>2</sup>
Surface per pallet	106,4 m <sup>2</sup>
Net weight	7,3 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0103
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,0942 kg CO <sub>2</sub> eq / m <sup>2</sup>
LRV - overall average / Standard deviation	31 / 3


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction  
Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

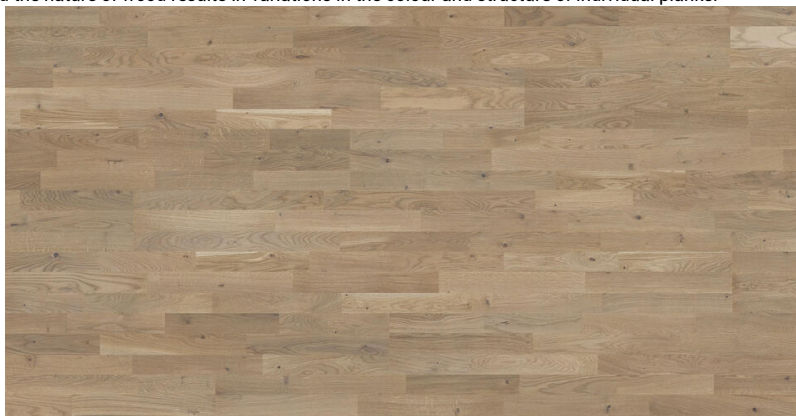

# Shade - OAK COTTON WHITE DUOPLANK (2-strip)

## Datasheet

Product Information	Tarkett Value
Material code	8727004
Format	Plank 194 x 2281 mm
Pattern	(2-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m <sup>2</sup>
Surface per pallet	106,4 m <sup>2</sup>
Net weight	6,7 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	48 / 2


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m <sup>2</sup> K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction  
Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

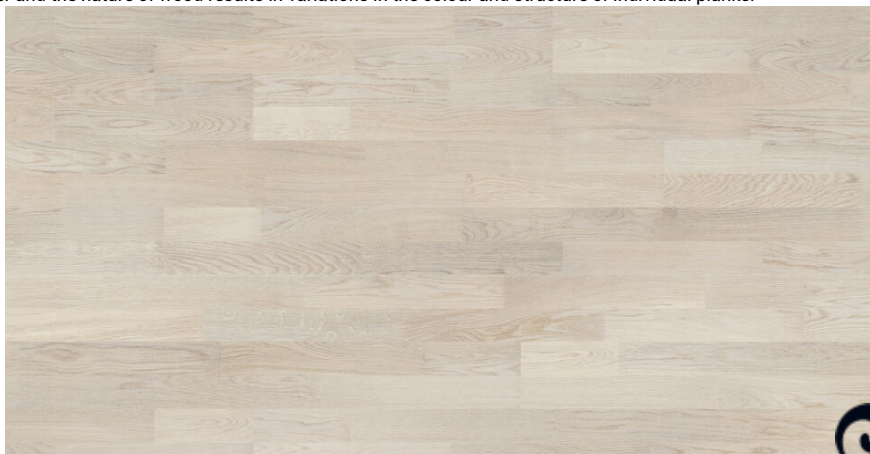

# Shade - OAK ESSENCE DUOPLANK (2-strip)

## Datasheet

Product Information	Tarkett Value
Material code	8727009
Format	Plank 194 x 2281 mm
Pattern	(2-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m <sup>2</sup>
Surface per pallet	106,4 m <sup>2</sup>
Net weight	6,7 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	31 / 4


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m <sup>2</sup> K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction  
Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

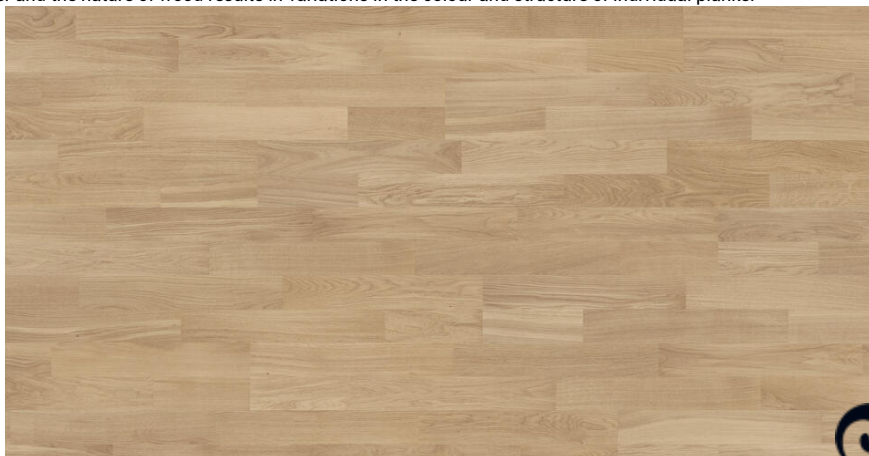

# Shade - OAK ITALIAN BROWN DUOPLANK (2-strip)

## Datasheet

Product Information	Tarkett Value
Material code	8727013
Format	Plank 194 x 2281 mm
Pattern	(2-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m <sup>2</sup>
Surface per pallet	106,4 m <sup>2</sup>
Net weight	6,7 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	13 / 3


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m <sup>2</sup> K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction  
Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

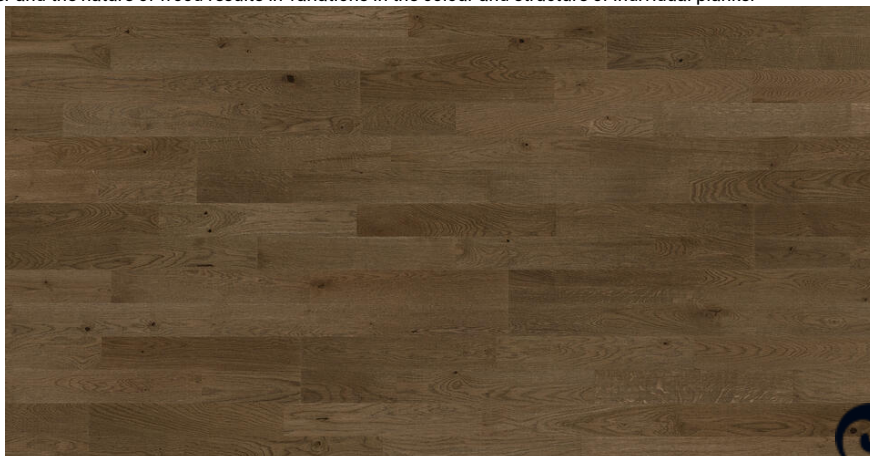

# Shade - OAK CREAM WHITE DUOPLANK (2-strip)

## Datasheet

Product Information	Tarkett Value
Material code	8727901
Format	Plank 194 x 2281 mm
Pattern	(2-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m <sup>2</sup>
Surface per pallet	106,4 m <sup>2</sup>
Net weight	6,7 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO <sub>2</sub> eq /m <sup>2</sup>
LRV - overall average / Standard deviation	38 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index $\Delta L_w$ in dB with 2 mm Tarkofoam/flex II	$\geq 17$	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m <sup>2</sup> K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m <sup>2</sup> K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m <sup>2</sup> K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction  
Softwood Veneer and  
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

