


Description

Droptile Edge is a profile made from recycled rubber granules bonded with polyurethane elastomer.

Droptile Edge helps ensure a safe transition thanks to its beveled edges.

The perfect finishing touch to complement our Droptile Black & Droptile Speckle solutions.

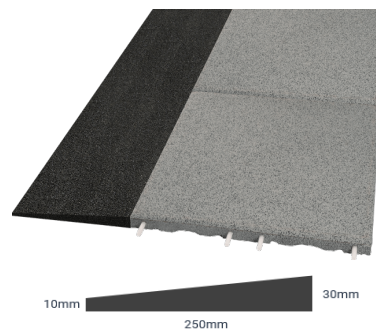

PROPERTIES

STANDARDS

DROPTILE EDGE

TECHNICAL CHARACTERISTICS

Thickness	ISO 24346 (EN 428)	10/30mm (± 2 mm)
Unit weight	ISO 23997 (EN 430)	4.2kg
Length	ISO 24341 (EN 426)	1000mm (± 0.8 %)
Width	ISO 24341 (EN 426)	250mm (± 0.8 %)

TECHNICAL PERFORMANCES

Reaction to fire	EN 13501-1	Efl
Tensile strength	EN ISO 1798	0.5N/mm ²
Elongation at break	EN ISO 1798	minimum 40%
Hardness	DIN 53505	60 ± 5 Shore A
Range temperature	Internal testing	-30°C to 80°C

Colors available



Installation and maintenance guides available on request

Technical data in force as from the date of publication (10/2020).

The values above correspond to laboratory test (no in situ test), and are subject to modifications for the benefit of further improvement. For more detailed technical information, please contact Tarkett Sports.

Colors of the products shown in the photos or samples are indicative only. There may be differences in color, gloss and embossing structure between the products sold and photos or samples.