

Pure

Datasheet



INSTALLATION

- Installation method: 2-lock for floating or glue down
- Installation instruction: Download from www.tarkett.com. Contact your supplier for more details
- Underfloor heating compatible (except for 'Beech'). Maximum floor surface temperature 27°C with self-regulating underfloor heating system
- Start & Stop: Shorter lengths of planks included in approx. 1 pack per 20 m²

MAINTENANCE

These Tarkett wooden floors have a Proteco surface treatment and therefore a strong protection against normal wear, abrasion, scratches and stains. Some floors will require more frequent maintenance for increased life span. Generally these products are light coloured floors and hardwax oiled floors, particularly with brushed surface and/or highlighted details.

Always make sure to follow the most recently updated maintenance instructions on www.tarkett.com.

RECOMMENDED ACCESSORIES

- Installation: Tarkofoam II / Tarkoflex II / Installation kit
- Aesthetics: Skirting, Transition moulding, Pipe covers
- Care & maintenance: Tarkoclean for lacquered floors, Refresher for lacquered floors

See more alternatives and the complete range of accessories @ www.tarkett.com

Product Name	Product Code	Page
Pure - OAK NATURE MIDIPLANK (1-strip)	8540002	3
Pure - OAK ROBUST PLANK (1-strip)	8723021	4
Pure - OAK ROBUST PLANK (1-strip)	8723923	5
Pure - OAK NATURE PLANK (1-strip)	8723924	6
Pure - OAK NATURE PLANK (1-strip)	8727002	7
Pure - OAK RUSTIC PLANK (1-strip)	8727003	8
Pure - OAK RUSTIC PLANK (1-strip)	41016012	9
Pure - OAK NATURE PLANK (1-strip)	7876126	10
Pure - OAK NATURE PLANK (1-strip)	7876127	11
Pure - OAK RUSTIC PLANK XT (1-strip)	7876131	12
Pure - OAK RUSTIC PLANK XT (1-strip)	7876132	13
Pure - BEECH NATURE TRES (3-strip)	7876957	14
Pure - ASH NATURE TRES (3-strip)	7876958	15
Pure - BIRCH TRES (3-strip)	7878911	16
Pure - OAK RUSTIC TRES (3-strip)	7878912	17
Pure - OAK NATURE TRES (3-strip)	7879003	18
Pure - OAK NATURE TRES (3-strip)	7879004	19
Pure - OAK NATURE DUOPLANK (2-strip)	7930003	20
Pure - OAK RUSTIC DUOPLANK (2-strip)	7969008	21

Pure - OAK NATURE MIDIPLANK (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	41016012
Format	Plank 134 x 1850 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	8
Surface per box	1,98 m ²
Surface per pallet	55,44 m ²
Net weight	7,3 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0103
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	33 / 3

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

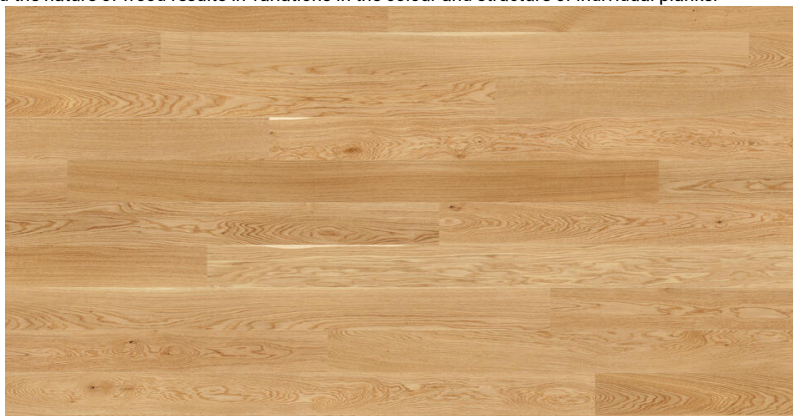

Pure - OAK ROBUST PLANK (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7876126
Format	Plank 162 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	None
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,14 m ²
Surface per pallet	77,04 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	30 / 4

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

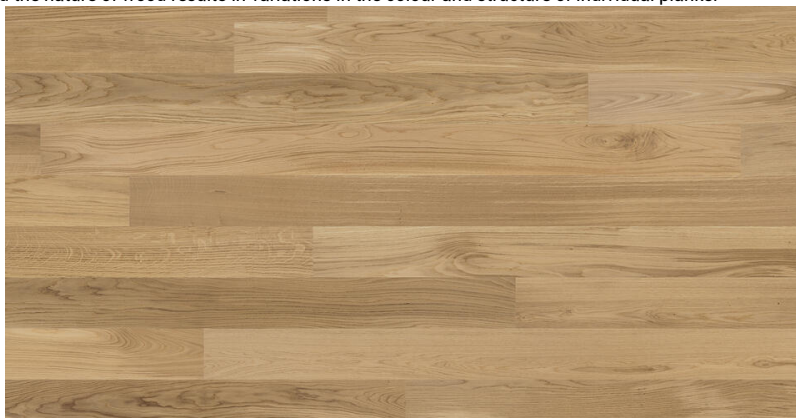

Pure - OAK ROBUST PLANK (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7876127
Format	Plank 162 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	None
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	1,94 m ²
Surface per pallet	69,84 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	30 / 4

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

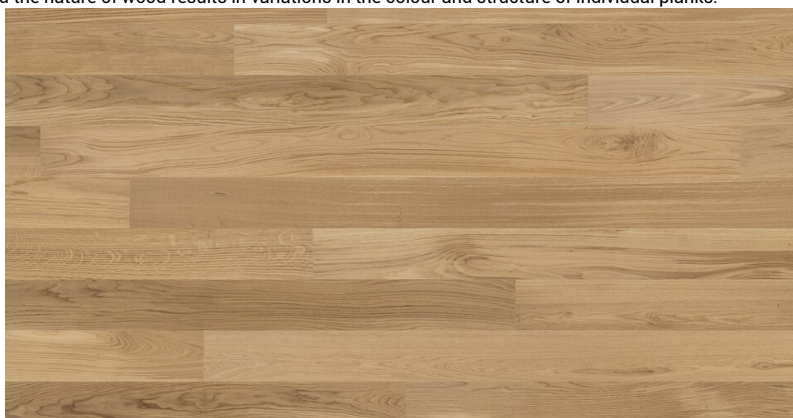

Pure - OAK NATURE PLANK (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7876131
Format	Plank 162 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,14 m ²
Surface per pallet	77,04 m ²
Net weight	7,9 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	33 / 3

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

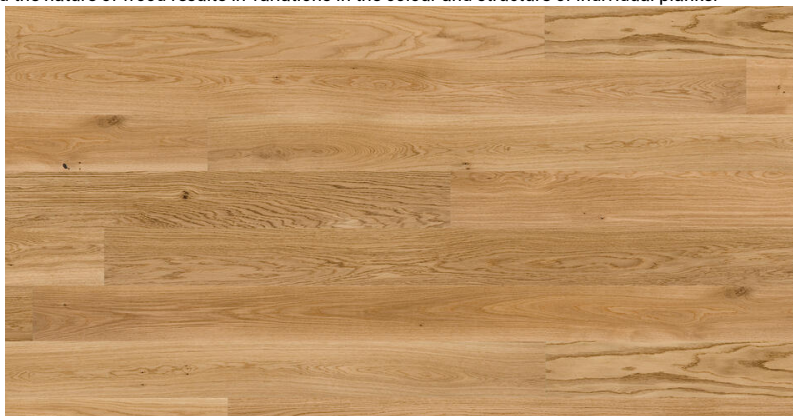

Pure - OAK NATURE PLANK (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7876132
Format	Plank 162 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	1,94 m ²
Surface per pallet	69,84 m ²
Net weight	7,9 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	33 / 3

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

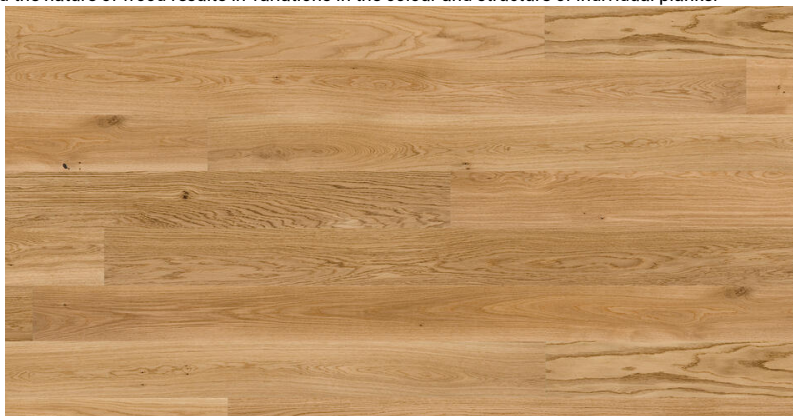

Pure - OAK RUSTIC PLANK (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7876957
Format	Plank 162 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,14 m ²
Surface per pallet	77,04 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	28 / 5

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

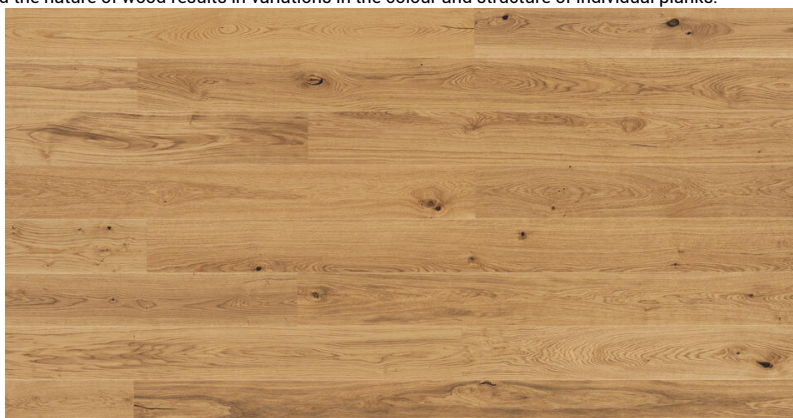

Pure - OAK RUSTIC PLANK (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7876958
Format	Plank 162 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	1,94 m ²
Surface per pallet	69,84 m ²
Net weight	7,9 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0105
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	28 / 5

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

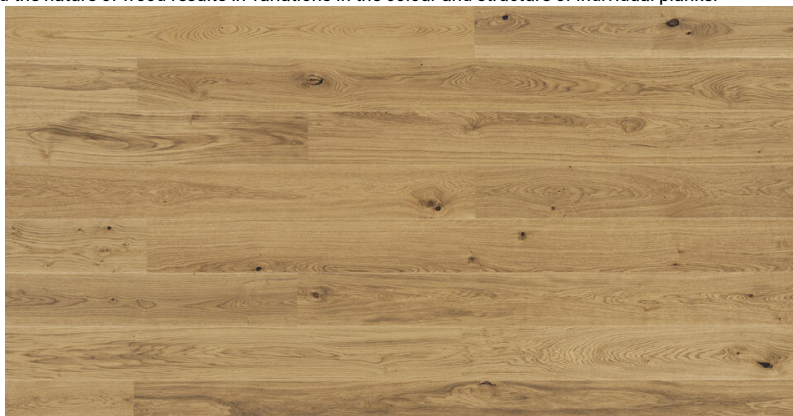

Pure - OAK NATURE PLANK (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7878911
Format	Plank 162 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	1,94 m ²
Surface per pallet	69,84 m ²
Net weight	7,3 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0103
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	33 / 3

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

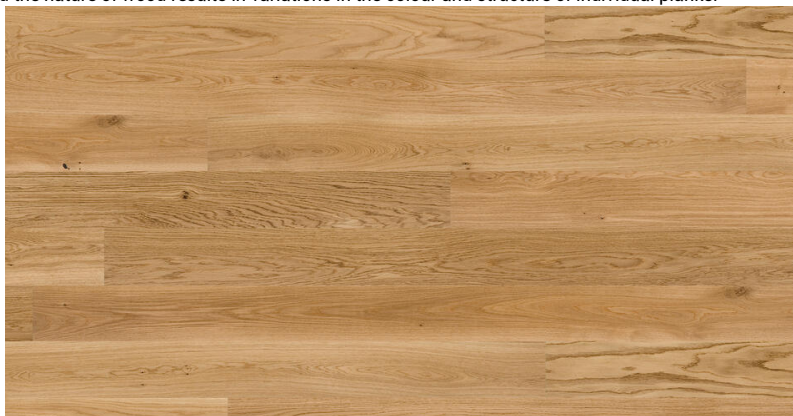

Pure - OAK NATURE PLANK (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7878912
Format	Plank 162 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,14 m ²
Surface per pallet	77,04 m ²
Net weight	7,3 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0103
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	33 / 3

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

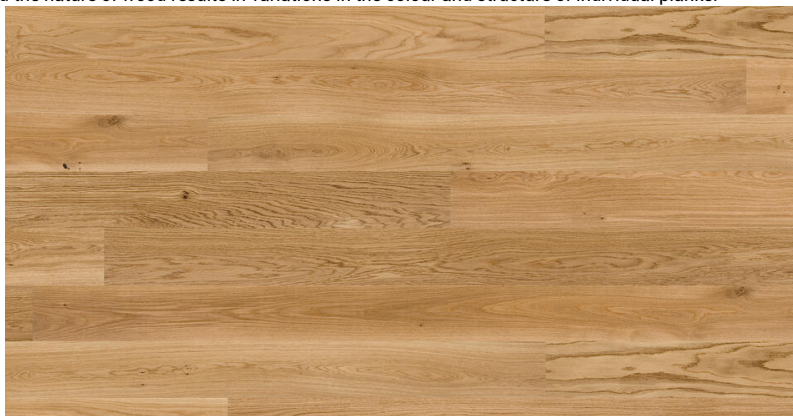

Pure - OAK RUSTIC PLANK XT (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7879003
Format	Plank 190 x 2000 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,28 m ²
Surface per pallet	79,8 m ²
Net weight	7,3 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0103
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	28 / 5


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction Softwood Veneer and Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

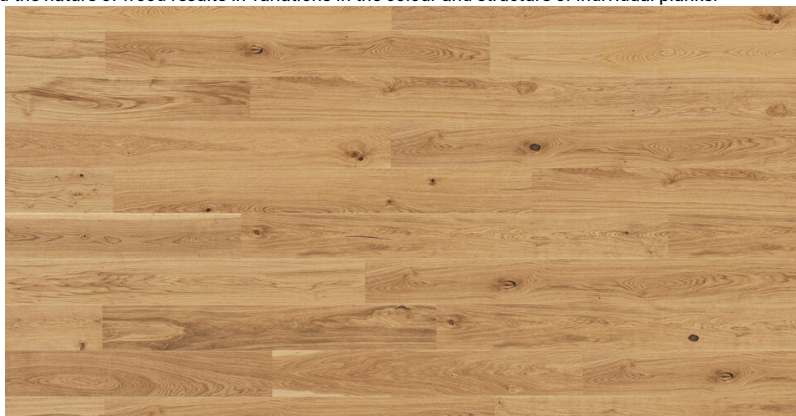

Pure - OAK RUSTIC PLANK XT (1-strip)

Datasheet

Product Information	Tarkett Value
Material code	7879004
Format	Plank 190 x 2200 mm
Pattern	(1-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Bevelled edges	2-side minibevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,51 m ²
Surface per pallet	87,85 m ²
Net weight	7,3 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0103
EPD Number	S-P-06627
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,35 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	28 / 5

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

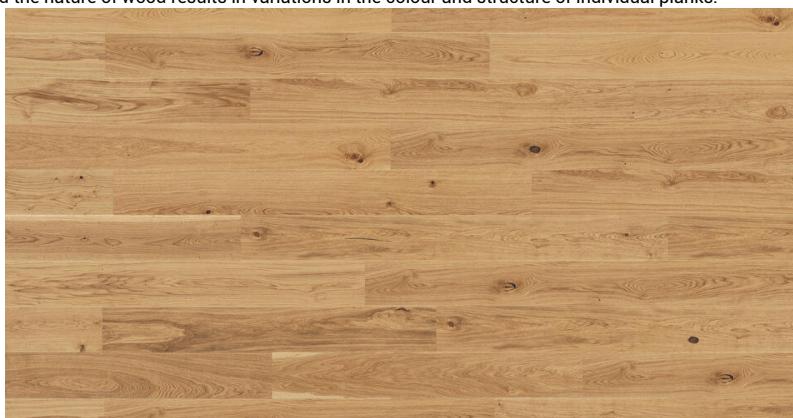

Pure - BEECH NATURE TRES (3-strip)

Datasheet

Product Information	Tarkett Value
Material code	7930003
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Lacquer
Surface effect	None
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,6 kg
Character	Calm
Latin Name	Fagus Sylvatica
Declaration of Performance #	0020-0106
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	30 / 5


Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.8	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m ² K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m ² K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m ² K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	4000	EN 13696
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction Softwood Veneer and Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

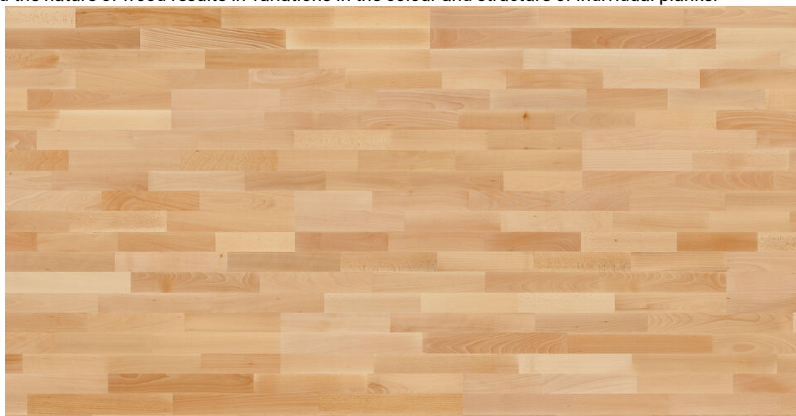

Pure - ASH NATURE TRES (3-strip)

Datasheet

Product Information	Tarkett Value
Material code	7969008
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	106,4 m ²
Net weight	6,7 kg
Character	Lively
Latin Name	Fraxinus Angustifolia
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,0942 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	58 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	4	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m ² K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m ² K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m ² K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	3500	EN 13696
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction Softwood Veneer and Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Pure - BIRCH TRES (3-strip)

Datasheet

Product Information	Tarkett Value
Material code	8540002
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Lacquer
Surface effect	None
Wear layer thickness	3,5 mm
Total thickness	14 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	93,1 m ²
Net weight	7,3 kg
Character	Lively
Latin Name	Betula Pendula
Declaration of Performance #	0020-0106
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	45 / 5

Due to the nature of the material this table shows typical values.


Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	2.6	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m ² K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m ² K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m ² K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.11	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	4000	EN 13696
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction

Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

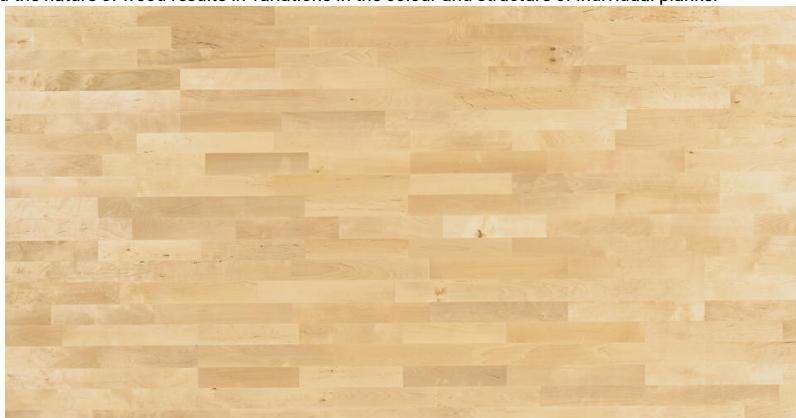

Pure - OAK RUSTIC TRES (3-strip)

Datasheet


Product Information	Tarkett Value
Material code	8723021
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Bevelled edges	No bevel
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	106,4 m ²
Net weight	7,3 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	2702-0103
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,0942 kg CO ₂ eq / m ²
LRV - overall average / Standard deviation	30 / 8

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m ² K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m ² K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m ² K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	3500	EN 13696
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2
Construction	Softwood Veneer and Lamella core 3-layer	



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

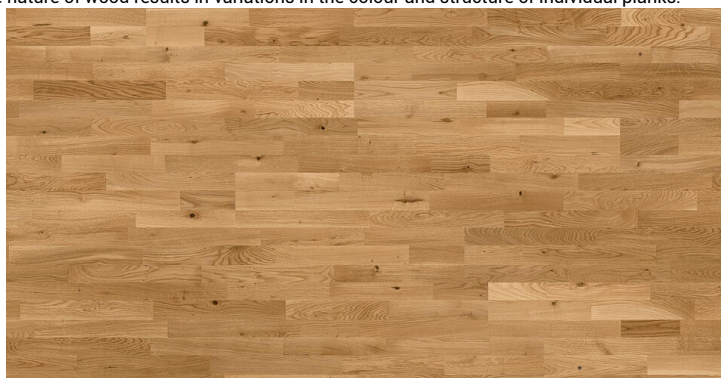

Pure - OAK NATURE TRES (3-strip)

Datasheet

Product Information	Tarkett Value
Material code	8723923
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Lacquer
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	106,4 m ²
Net weight	6,7 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	27 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m ² K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m ² K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m ² K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	4000	EN 13696
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction Softwood Veneer and Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Pure - OAK NATURE TRES (3-strip)

Datasheet

Product Information	Tarkett Value
Material code	8723924
Format	Plank 194 x 2281 mm
Pattern	(3-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	106,4 m ²
Net weight	6,7 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-4,0942 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	26 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m ² K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m ² K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m ² K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	3500	EN 13696
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction Softwood Veneer and Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Pure - OAK NATURE DUOPLANK (2-strip)

Datasheet

Product Information	Tarkett Value
Material code	8727002
Format	Plank 194 x 2281 mm
Pattern	(2-strip)
Surface treatment	Proteco Natura
Surface effect	None
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	106,4 m ²
Net weight	6,7 kg
Character	Calm
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	26 / 4

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	≥ 17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m ² K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m ² K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m ² K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Taber Abraser/Lacquer's wear resistance	3500	EN 13696
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction Softwood Veneer and Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.



Pure - OAK RUSTIC DUOPLANK (2-strip)

Datasheet

Product Information	Tarkett Value
Material code	8727003
Format	Plank 194 x 2281 mm
Pattern	(2-strip)
Surface treatment	Proteco Natura
Surface effect	Brushed
Wear layer thickness	2,5 mm
Total thickness	13 mm
Items per box	6
Surface per box	2,66 m ²
Surface per pallet	106,4 m ²
Net weight	6,7 kg
Character	Lively
Latin Name	Quercus Robur & Quercus Petraea
Declaration of Performance #	0020-0104
EPD Number	EPD-IES-0026262
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)	-7,49 kg CO ₂ eq /m ²
LRV - overall average / Standard deviation	27 / 3

Due to the nature of the material this table shows typical values.

Characteristics & Technical Performance	Tarkett Value	Norm
Reaction to fire	Dfl-s1	EN 14342 - Table 1
Formaldehyde emission	E1	EN 14342
Brinell hardness (average value)	3.7	(BHN) EN 1534
Reduction of sound weighted index ΔLw in dB with 2 mm Tarkofoam/flex II	≥17	EN ISO 10140-3 / EN ISO 717-2
Thermal insulation value : board only (RT m2 K/W)	0.101	EN ISO 10456:2007
Thermal insulation value : with rag felt (RT m2 K/W)	0.121	EN ISO 10456:2007
Thermal insulation value : with 2 mm Tarkofoam/flex II (RT m2 K/W)	0.141	EN ISO 10456:2007
Thermal conductivity (W/m K)	0.104	EN 12664 / EN 14342:2013
Slip Resistance (EN 16165 Annex C)	Low risk of slip	BS 7976-2

Construction
Softwood Veneer and
Lamella core 3-layer



The quality of monitor and printer and the nature of wood results in variations in the colour and structure of individual planks.

