Static control strips for rolls
Copper strips

STATIC CONTROL

DESCRIPTION

Copper thread strip used to facilate static dissipative properties.
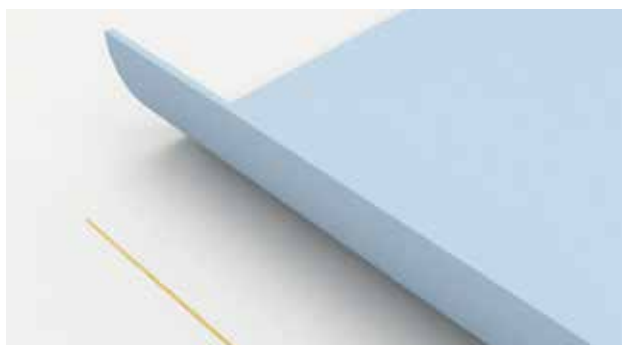Installed under the floorcovering. To be glued.

Key features:
- Better conductivity of floorings.

Compatible flooring:
- Static dissipative products (Homogeneous and linoleum floorcoverings)

Main segments of application:

TECHNICAL INFORMATION

Product

Size (mm)	33000 length x 12 width x 0,074 thickness (with adhesive) x0,0042 thickness (without adhesive) 110 lm for one surface 800 sqm ie 4 bobbins
Unit weight (g)	175

Packaging

Pieces per box	25
Box size (cm)	170 width x 320 height x 170 length
Box weight (kg)	4,375
Min. order	1 bobbin (33lm)

CLEANING & MAINTENANCE

No cleaning or maintenance required.

ARTICLE CODE

	SAP Code	EAN Code
Copper / Cuivre	1256 727	7393799068546

INSTALLATION

- Use an Acrylic adhesive.
- Install one copper strip every 20lm.

Tarkett