

Technical Datasheet

Tarkett Genius Tape

DOUBLE SIDED TAPE

DESCRIPTION

TARKETT GENIUS TAPE is designed to be used with the Excellence Genius loose-lay range. It is a removable double sided adhesive on a grid support, formulated with solvent-free acrylic glue to better respect the environment. Ideal for renovation areas where asbestos regulations are needed, TARKETT GENIUS TAPE will stick perfectly to the resilient flooring backing and ever so slightly to the subfloor - ensuring safe installation and allowing easy removal. When it comes to removing the flooring, GENIUS TAPE will leave the floor intact.


Key features:

- Double sided tape
- Designed to be used with Genius loose-lay range
- Ideal to be used in accordance with asbestos regulation
- Solvent free
- Easy use thanks to its protective film
- Easy disposable of the flooring even after several years and without damage to the subfloor

Compatible flooring:

- Heterogeneous vinyl Excellence Genius Loose-lay

Main segments of application:

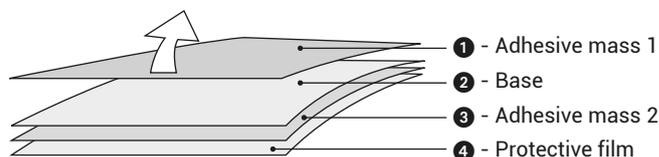

TECHNICAL INFORMATION

Product

Length (Lm)	25
Width (mm)	96
Thickness (mm) without protective film	0,205
Unit weight (g)	500

Packaging

Pieces per box	3
Box size (mm)	182 x1 82 x 346
Box weight (kg)	2,5
Pallet size (mm)	1200 x 800 x 1200
Pallet weight (kg)	180
Min. order	1 piece

ARTICLE CODE

SAP Code	EAN Code
1257001	3423128274141

INSTALLATION

- The floor has to be clean and dry, oil free, silicon free and dust free.
- The room, the product and the tape have to be between 18°C and 30°C.
- Humidity between 50% and 60%
- Press the elements with a pressure of 0.02 Mpa
- Waiting time of 24h for an optimum adhesion

CLEANING & MAINTENANCE

No cleaning or maintenance required.

